


PERFORMANCE

Model	Maximum flow rate			Maximum head	
	l/min	cu.m/hr	gall/min	metres	feet
PC40B14	267	16	59	39.5	130

Maximum power absorbed 3.7kW at 2500rpm

DIMENSIONS IN MM (APPROX.)

WEIGHT: 12.8kg

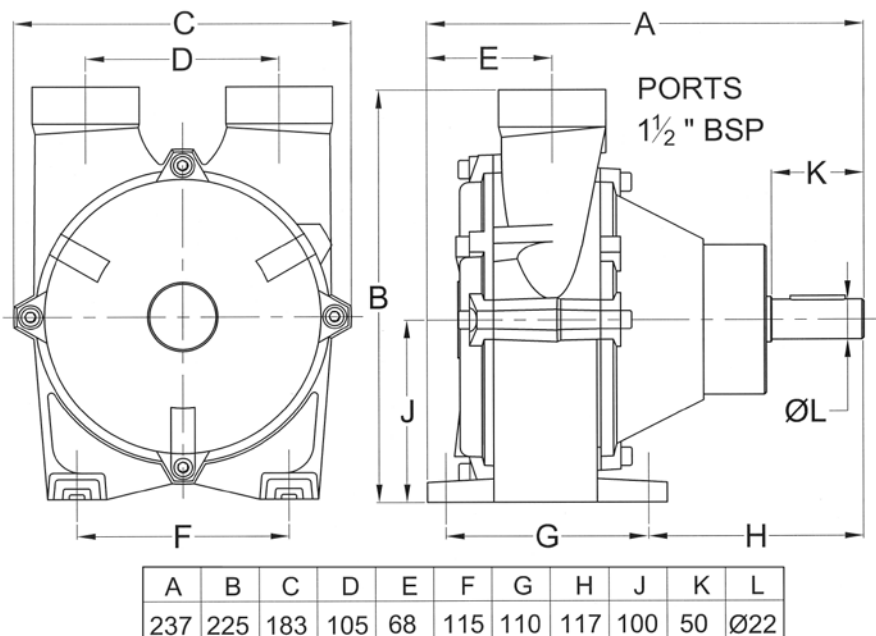

MATERIALS OF CONSTRUCTION

Pump casing	bronze
Impeller	bronze
Shaft	stainless steel AISI316
Bearing housing	cast iron
Pump head bolts	stainless steel
O-ring static seal	nitrile rubber

Pump performance and specification are subject to alteration without notice

AVAILABLE CLUTCHES (ask for a data sheet) 'A' series marked *

Clutch Type	Pulley Pitch Dia	Pulley Belt Section	No of Belts	FP Code
24v dc*	152mm	SPB	1	FP-94-8110427
24v dc*	145mm	A	2	FP-94-8130427
MANUAL	125mm	SPB	1	FP-94-8010611

FP PUMPS

PC40B14

**1½" BRONZE
SELF-PRIMING SIDE
CHANNEL PUMP**



- ◆ reliable continuous duty pump
- ◆ corrosion-resistant bronze, with stainless steel shaft
- ◆ self-priming up to 4m
- ◆ direction of flow can be reversed
- ◆ carbon-ceramic mechanical shaft seal

BRONZE PUMPS

for

SEAWATER

Xylem Water Solutions UK Ltd
Bingley Road
Hoddesdon
Hertfordshire • EN11 0BU • UK

Tel: +44 (0)1462 480380
Fax: +44 (0)1462 482422
mail@cleghorn.co.uk
www.jabscoshop.com

xylem
Let's Solve Water